


JACKETED BALL VALVE

- One Piece Uni-body, Full Port or Reduced Bore
- Floating Ball, Fire Safe, Blow-out Proof Stem
- Anti-static Device, Cavity Relieving Seats
- NACE MR-01-75, Optional Locking Device
- Designed to ASME B16.34

Face to Face	VATAC Standard
End Flange	ASME B16.5
Butt Weld	ASME B16.25
Class	PN16

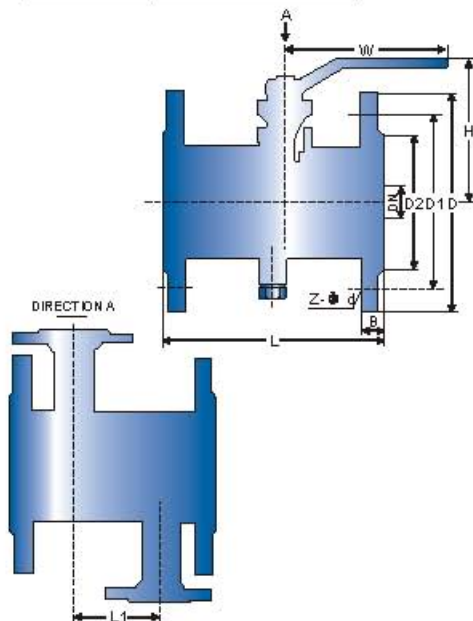


PN16 DIMENSION

SIZE (DN)	L	L1	D	D1	D2	B	Z-φd	H	W	WT(kg)
15	108	45	95	85	45	14	4-φ14	95	160	2.5
20	117	55	105	75	55	14	4-φ14	101	160	3
25	127	65	115	85	65	14	4-φ14	106	160	5
32	140	78	135	100	78	16	4-φ18	112	230	6
40	165	85	145	110	85	16	4-φ18	125	230	7
50	178	100	160	125	100	16	4-φ18	135	230	10
65	191	120	180	145	120	18	4-φ18	170	400	16
80	203	135	195	160	135	20	8-φ18	193	400	19
100	229	155	215	180	155	20	8-φ18	265	700	33
125	356	185	245	210	185	22	8-φ18	310	700	48
150	394	210	280	240	210	24	8-φ23	355	1100	62
200	457	265	335	295	265	26	12-φ23	410	1500	93
250	533	320	405	355	320	30	12-φ25	560	1500	120

WAFER BALL VALVE

- One Piece Uni-body, Full Port, Floating Ball
- Fire Safe, Blow-out Proof Stem
- Anti-static Device, Cavity Relieving Seats
- NACE MR-01-75, Optional Locking Device
- Designed to ASME B16.34

Face to Face	VATAC Standard
End Flange	ASME B16.5
Butt Weld	ASME B16.25
Class	PN 16/PN25

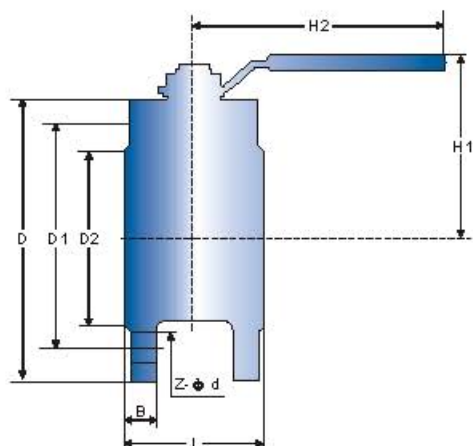

PN 16/25 DIMENSION

SIZE (DN)	L	D	D1	D2	B	Z-φd	H1	H2	Unit:mm
20	38	105	75	55	16	4-14	70	130	
25	45	115	85	65	16	4-14	80	150	
32	55	140	100	78	18	4-18	86	150	
40	62	150	110	85	18	4-18	92	180	
50	72	165	125	100	20	4-18	102	180	
65	95	185	145	120	22	8-18	160	250	
80	120	200	160	135	22	8-18	172	300	
100	145	230	190	160	24	8-23	187	350	
125	200	270	220	188	28	8-26	200	650	
150	225	300	250	218	30	8-26	240	840	

